

Capatect-Panzergebebe 652

Special reinforcing glass fabric to improve impact resistance




Product Description

Field of Application	Additional reinforcement for Capatect ETICS Systems A and B for areas of facades with high mechanical impact loads.
Material Properties	<ul style="list-style-type: none"> ■ Shear-resistant ■ Alkali-resistant ■ Free of plasticiser ■ Trimmed edge ■ Mesh size 5,5 x 5,0 mm
Packaging/Package Size	roll of 25 m , 100 cm wide
Colours	Orange
Storage	Dry
Technical Data	■ Area-related mass: 340 [g/m ²] ± 5 % as per DIN 53854
Product No.	652

Application

Consumption	per m ² : 1,0 [m ²]
Application	<p>Apply the system-related reinforcement mortar in the width of Capatect-Panzergebebe 652 onto the thermal insulating boards using a smoothing stainless steel trowel. Wet layer thickness approx. 2 [mm] (about 2.0 [kg/m²]).</p> <p>Embed the Capatect-Panzergebebe 652 into this mortar (blunt adjoined - not overlapping!) and pull the reinforcing material through the tissue sharply off with the trowel. Smooth the mortar to zero along the fabric border.</p> <p>Reinforce the complete surface wet on wet with the full-scale reinforcement fabric Capatect-Gewebe 650/110 over all as usual .</p>

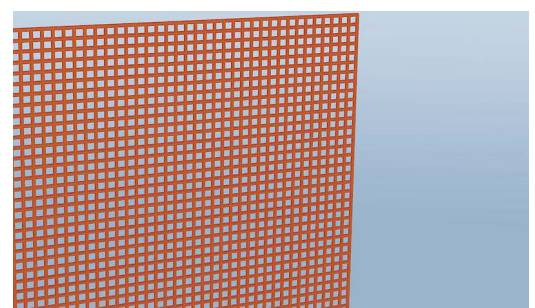

Advice

Disposal

Materials and all related packaging must be disposed of in a safe way in accordance with the full requirements of the local authorities. Particular attention should be paid to removing wastage from site in compliance with standard construction site procedures.
For EU: Dispose material residues as per EWC (European Waste Catalogue) 101 103 (old glass fibre materials) or according to EWC 170904 (mixed construction and demolition waste).

Customer Service Centre

Tel.: (+49) 0 61 54 / 71 17 10
Fax: (+49) 0 61 54 / 71 17 11
e-mail: kundenservicecenter@caparol.de

International Distribution: Please see www.caparol.com

Technical Information No. 652 · Issue: December 2013

All suggestions and application instructions herein are based on our latest technical experience. Due to the wide variety of individual project conditions, we cannot be held responsible for their content. These instructions do not release the purchaser/ applicator from his responsibility to determine the suitability of the product in consideration of the project characteristics. These instructions are to be considered void when a new edition is released. Our general conditions of sale and delivery in their latest edition apply. This document is a translation of our German Technical Information No. 652 · Capatect-Panzergewebe 652 · Issued: January 2010

DAW International Business: **DAW SE** · P.O.B. 1264 · D-64369 Ober-Ramstadt · Tel. +49 6154 71-1274 · Fax +49 6154 71-1264 · Internet www.caparol.com