

Capatect-Sockelschiene 6700

Base rail; L-shaped light metal profile with front side drip-edge




Product Description

- Field of Application Profile for starting up Capatect ETICS Systems A + B. Base supporting and protective rail for the lower end.
- Material Properties ■ Extruded aluminium profile
Keeps ETICS bottom edge closed and protected .
Easy to install due to form- and dimension stability
Fast water drainage.
- Colours Aluminium blank
- Storage Store dry and horizontally. Protect from moisture.

Product No.

Product-No.	Insulation Layer Thickness [mm]	Throat Depth [mm]	Length [mm]	Packaging [units]
6700/05	50	53	2000	10 = 20 m
6700/06	60	63		
6700/07	70	73		
6700/08	80	83		
6700/10	100	103		
6700/12	120	123		
6700/14	140	143		
6700/15	150	153		
6700/16	160	163		
6700/18	180	183		
6700/20	200	203		

Special profiles on request

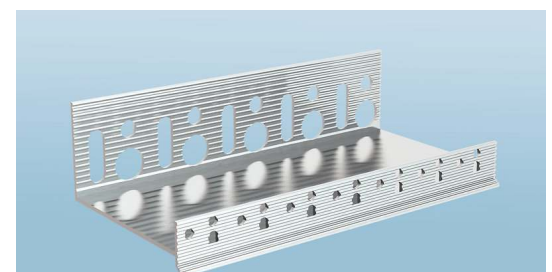

Sales programme

Bits and pieces for mounting

Product N°		Carton containing
619/00	Capatect-Montage-Set klein (small)	80 knock-in anchors, Ø 6 mm, length 60 mm 20 base rail connectors
619/01	Capatect-Montage-Set groß (large)	150 knock-in anchors, Ø 6 mm, length 60 mm 40 base rail connectors 50 spacers, 3 mm thick
634/50	Capatect-Distanzstücke-Set	190 spacers, 3 mm thick 190 spacers, 5 mm thick 20 spacers, 10 mm thick
612/06	Capatect-Montage-Schlagschrauben	100 knock-in anchors, Ø 8 mm length 60 mm
612/08	Capatect-Montage-Schlagschrauben	100 knock-in anchors, Ø 8 mm length 80 mm

Additional elements (optional)

Product N°		Carton containing	Description
6690/05–20	Capatect-Sockel-Eckprofil „Plus“	5 units	Element for external corner; to be bended up to 90 ° due to v-notched back side centered excerpt; length 835 mm*
6680/10	Capatect-Sockel-schienen-Aufsteckprofil „Plus“ (Type 10)	10 units	Clip-on profile for enlargement of the reinforcement coat up to 6 – 10 mm; length 200 cm

* Fixing with minimum two knock-in anchors each side.

Application

Substrate Preparation

Remove putty-burs and fill cavities in render/plaster. Remove adherent oil films (extruder remnants) from profiles.

Consumption

per meter: 1 m

Installation

Select the Capatect-Sockelschiene according to the insulation board thickness. Mark the base line by chalk line. Fix the base rail using components of the Capatect Montage set. Max distens of anchors: 30 cm. Elongated mounting holes facilitate an exact alignment.

Use base rail connectors for exact distance to the subsequent profile and alignment . Fill substrate irregularities with the Capatect spacers in the right thickness before final knock-in of the anchors.

Advice

Customer Service Centre

Tel.: (+49) 0 61 54 / 71 17 10
Fax: (+49) 0 61 54 / 71 17 11
e-mail: kundenservicecenter@caparol.de

International Distribution: Please see www.caparol.com